

FIBER OPTIC COMPONENTS

Features

- * Single mode and Multimode
- * Zirconia sleeves or Phosphor bronze sleeves
- * NTT standard compatible
- * Patch panel mount applications
- * Meet JIS5974 and bellcore GR-326 standard
- * Compliant with IEC874-14 & IEC874-19
- * All parts compliant with ROHS

FC ADAPTER



Application

- Telecommunication
- CATV
- LAN & WAN
- Network
- Broadband
- FTTH

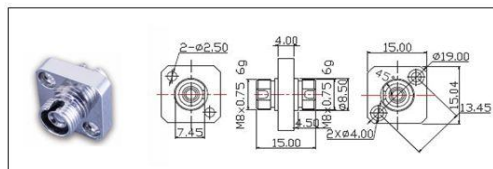


Figure1. FC Square Solid Body Adaptor

Appearance & Dimension

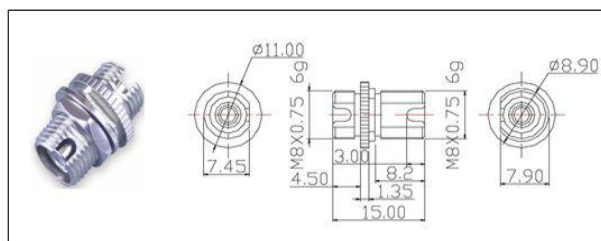


Figure4. FC D Adaptor

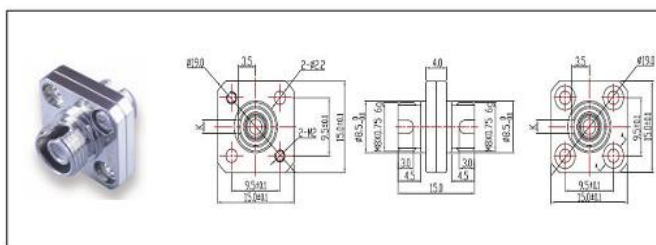


Figure2. FC Square Twain Adaptor

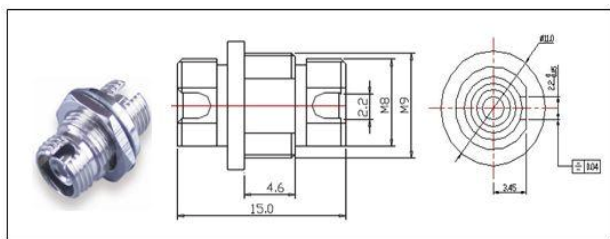


Figure5. FC D3 Adaptor

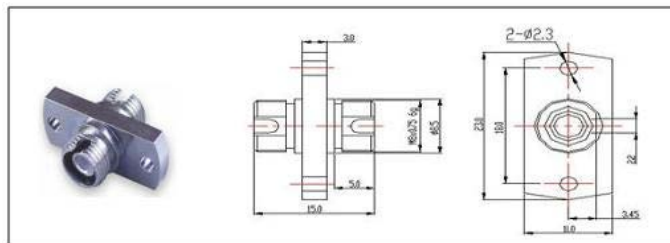


Figure3. FC Rectangle Adaptor

Parameter

Product	FC Adaptor	
Mode	S.M(Zroz)	M.M(P.B)
Insertion Loss	≤0.2dB	≤0.3dB
Return Loss	≥45dB	--
Mating Durability(500 timer)	Additional Loss≤0.1dB,Return Loss Variability<5dB	
Temperature Stability(-40°C~85°C)	Additional Loss≤0.2dB,Return Loss Variability<5dB	
Operating Temperature	-40°C~+85°C	
Storage Temperature	-40°C~+85°C	

Ordering Information

CODE	SLEEVE	TYPE	HOUSING	FIGURE
1	Zirconia	1 Simplex	1 SM	1 Square Solid Body
2	P.B	2	2 MM	2 Square Twain
		3	3 APC	3 Rectangle