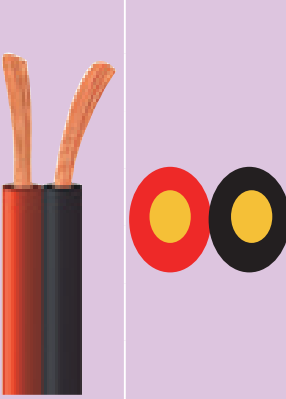



Jumper Cable

Photo	Model No.	Conductor		Insulation		Max. Conductor Resistance@ 20°C	Mini. Insulation Resistance@70°C (MKM)
		Material	Dia.	Material	Thickness		
	RVB 2x0.12	BC	2x7/0.15	PVC	0.50	158.00	0.016
	RVB 2x0.2	BC	2x12/0.15	PVC	0.60	92.30	0.014
	RVB 2x0.3	BC	2x16/0.15	PVC	0.60	69.20	0.016
	RVB 2x0.4	BC	2x23/0.15	PVC	0.60	48.20	0.014
	RVB 2x0.5	BC	2x16/0.20	PVC	0.80	39.00	0.013
	RVB 2x0.75	BC	2x24/0.20	PVC	0.80	26.00	0.011
	RVB 2x1.0	BC	2x32/0.20	PVC	0.80	19.50	0.010
	RVB 2x1.5	BC	2x30/0.25	PVC	0.80	13.30	0.010
	RVS 2x0.12	BC	2x7/0.15	PVC	0.50	158.00	0.016
	RVS 2x0.2	BC	2x12/0.15	PVC	0.60	92.30	0.014
	RVS 2x0.3	BC	2x16/0.15	PVC	0.60	69.20	0.016
	RVS 2x0.4	BC	2x23/0.15	PVC	0.60	48.20	0.014
	RVS 2x0.5	BC	2x16/0.20	PVC	0.80	39.00	0.013
	RVS 2x0.75	BC	2x24/0.20	PVC	0.80	26.00	0.011
	RVS 2x1.0	BC	2x32/0.20	PVC	0.80	19.50	0.010
	RVS 2x1.5	BC	2x30/0.25	PVC	0.80	13.30	0.010