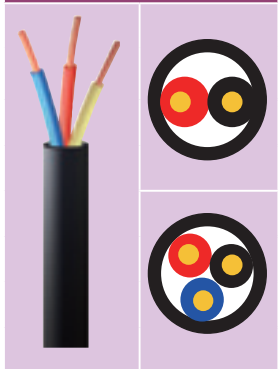


Power Cable

Photo	Model No.	Conductor		Insulation	Outer Jacket	Max. Conductor Resistance@ 20 °C	Mini. Insulation Resistance@ 70 °C (M/KM)
		Material	Dia.				
	RVV 2x0.5	BC	2x16/0.20	1.90	4.90	39.00	0.013
	RVV 2x0.75	BC	2x24/0.20	2.30	5.40	26.00	0.011
	RVV 2x1.0	BC	2x32/0.20	2.50	6.60	19.50	0.010
	RVV 2x1.5	BC	2x30/0.25	2.90	7.40	13.30	0.010
	RVV 3x0.5	BC	2x16/0.20	1.90	5.20	39.00	0.013
	RVV 3x0.75	BC	2x24/0.20	2.30	5.70	26.00	0.011
	RVV 3x1.0	BC	2x32/0.20	2.50	7.0	19.50	0.010
	RVV 3x1.5	BC	2x30/0.25	2.90	8.0	13.30	0.010