

10/100M Managed Industrial Ethernet Switches

PG-GY044

Introduction	Image
<p>This managed industrial Ethernet switch is designed to match the critical industrial standards. With reliable and simple operation against vibration and shock, and wide operation temperature range, it could match a variety of harsh environments.</p> <p>The switch complies with CE, FCC and RoHS standards, and passed the 100% burning test to ensure that it will fulfill the needs of industrial applications. It is a good choice for an economical solution for industrial Ethernet connections.</p>	   

Features & Benefits
4*10/100Base-T(X) ports and 4*100Base-FX ports
“OP-Ring” (recovery time<20ms), RSTP/STP, and MSTP for network redundancy
SNMPv3, ieee802.1X, HTTPS and SSH to enhance network security
Port-based VLAN, IEEE802.1Q VLAN and GVRP to ease network planning
DHCP Option 82 for IP address assignment with different policies
Ethernet/IP and Modbus/TCP industrial Ethernet protocol supported
Bandwidth management prevents unpredictable network status
RMON for efficient network monitoring and proactive capability
Lock port allows access by only authorized MAC addresses
Port mirroring for online debugging
Automatic warning by exception through email, relay output
QoS and ToS/DiffServ for flow control and management
IEEE 802.3ad, LACP for optimum bandwidth utilization
Configurable by CLI for advanced management function
-40°C -85°C operating temperature range

Physical Characteristics
Housing: Aluminum Alloy material with IP40 Protection
Dimension: 138mm(L) X 112mm(W) X 60mm(H)
Weight: 710g
Installation: Din-Rail mounting, Wall mounting

Switch Properties

Priority Queues: 4

Maximum No of Available VLANs: 256

VLAN ID: 1-4094

IGMP Groups: 256

MAC Table Size: 8K

Packet Buffer Size: 1M bit

Interfaces

SFP Port: 100Base-FX interface

RJ45 Port: 10/100Base-T(X) auto negotiation

Console Port: RS-232(RJ45 connector)

Alarm Contact: 1 relay outputs, supports IP/MAC conflict

Power

Input Voltage: 24V DC(18-36VDC) Redundant dual inputs

Input Current: <0.5A @24VDC

Overload Current Protection: Present

Reverse Polarity Protection: Present

Redundant Protection: Present

Connection: 1 removable 6-pin terminal blocks

Environmental Limits

Operating Temperature: -40°C -85°C

Storage Temperature: -40°C -85°C

Ambient Relative Humidity: 5%-95% (non-condensing)

Technology

Protocol: OP-Ring, IGMPv1/v2, GVRP, SNMPv1/ v2C/ v3, DHCP Client, TFTP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, SSH, SNMP Inform, LLDP, SNTP Service/ Client, PVLAN

MIB: MIB-II, Ethernet-Like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1,2,3,9

Flow Control: IEEE 802.3x flow control, back pressure flow control

Standards

IEEE 802.3 for 10BaseT
 IEEE 802.3u for 100BaseT(X)
 IEEE 802.3x for Flow Control
 IEEE 802.1D-2004 for Spanning Tree Protocol
 IEEE 802.1w for Rapid Spanning Tree Protocol
 IEEE 802.1Q for VLAN Tagging
 IEEE 802.1p for Class of Service
 IEEE 802.1X for Authentication
 IEEE 802.3ad for Port Trunk with LACP

EMS:

EN61000-4-2 (ESD), Level 3
 EN61000-4-3 (RS), Level 3
 EN61000-4-4 (EFT), Level 3
 EN61000-4-5 (Surge), Level 3
 EN61000-4-6 (CS), Level 3
 EN61000-4-16 (Common-mode Conduction), Level 3

Shock: IEC 60068-2-27

Free Fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

EMI: FCC CFR47 Part 15, EN55022/CISPR22, Class A

Industry: IEC61000-6-2

Rail: EN50155, EN50121-4


Traffic: NEMA TS-2

Warranty

5 years

Dimension

Units:mm

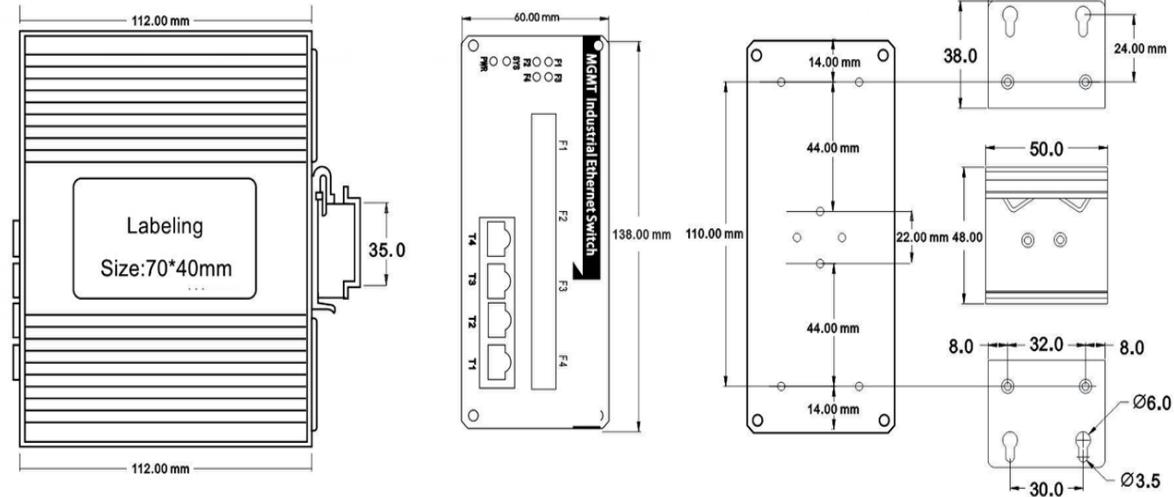

Models Available	
Model No	Description
Dual Fiber(Duplex)	
PG-GY044-MD	Multi-mode; 2Km; SC/ST/FC interfaces optional
PG-GY044-SD	Single-mode; 20Km; SC/ST/FC interfaces optional
PG-GY044-SD40	Single-mode; 40Km; SC/ST/FC interfaces optional
PG-GY044-SD60	Single-mode; 60Km; SC/ST/FC interfaces optional
PG-GY044-SD80	Single-mode; 80Km; SC/ST/FC interfaces optional
Single Fiber(Simplex)	
PG-GY044-MS	Multi-mode; 2Km; SC/ST/FC interfaces optional
PG-GY044-SS	Single-mode; 20Km; SC/ST/FC interfaces optional
PG-GY044-SS40	Single-mode; 40Km; SC/ST/FC interfaces optional
PG-GY044-SS60	Single-mode; 60Km; SC/ST/FC interfaces optional
PG-GY044-SS80	Single-mode; 80Km; SC/ST/FC interfaces optional