


Unmanaged Industrial Ethernet Switches

PG-GYF416

Introduction	Image
<p>This unmanaged industrial Ethernet switch is designed to match the critical industrial standards. With reliable and simple operation against vibration and shock, and wide operation temperature range, it could match a variety of harsh environment.</p> <p>The switch complies with CE, FCC and RoHS standards, and passed the 100% burning test to ensure that it will fulfill the needs of industrial applications. It is a good choice for an economical solution for industrial Ethernet connections.</p>	 <p>CE FCC RoHS</p>

Features & Benefits
16*10/100Base-T(X) ports and 4*1000Base-FX port (SFP Slot)
-40°C -85°C operating temperature range
Super lightning protection, IP40 protection
Excellent heat elimination without cooling fan

Physical Characteristics
Housing: Aluminum Alloy material with IP40 Protection
Dimension: 138mm(L) X 112mm(W) X 60mm(H)
Weight: 670g
Installation: Din-Rail mounting, Wall mounting

Switch Properties
MAC Table Size: 8K
Packet Buffer Size: 1M bit
Processing Type: Store and Forward
Exchange Properties: 1488000pps (1000M)

Interfaces
4*1000Base-FX port (SFP Slot)
16*RJ45 Ports: 10/100Base-T(X) auto negotiation

Power

Input Voltage: 24V DC(18-36VDC) Redundant dual inputs

Input Current: <0.5A @24VDC

Overload Current Protection: Present

Reverse Polarity Protection: Present

Redundant Protection: Present

Environmental Limits

Operating Temperature: -40°C -85°C

Storage Temperature: -40°C -85°C

Ambient Relative Humidity: 5%-95% (non-condensing)

Standards

EMS:

EN61000-4-2 (ESD), Level 3

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 3

EN61000-4-5 (Surge), Level 3

IEC61000-4-8(100A/m), Level 3

IEC61000-4-11, Level 3

Shock: IEC 60068-2-27

Free Fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

EMI: FCC CFR47 Part 15, EN55022/CISPR22, Class A

Industry: IEC61000-6-2


Rail: EN50155, EN50121-4

Traffic: NEMA TS-2

Warranty

5 years

Dimension

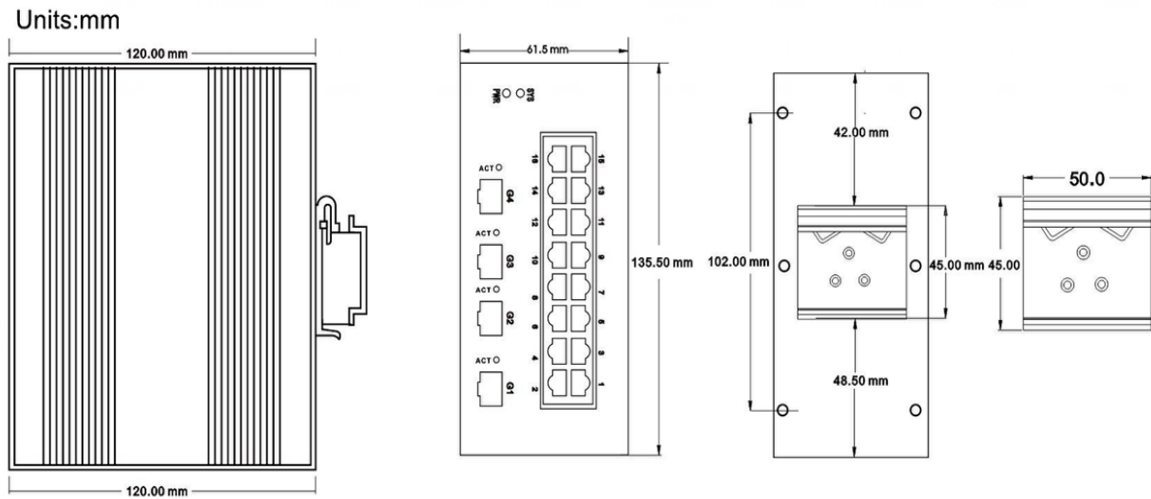

Models Available

Model No	Description
PG-GYF416	4*1000M SFP Slot and 16*10/100M RJ45 Port